

NOTE:



1. MATERIAL

- 1.1 CABLE: (7/0.18CU±0.008)*4PAIR+ LSZH JACKET.
CABLE MARKING:LANMASTER CAT.5E 4PAIR 24AWG UTP PATCH CORD
LSZH ISO/IEC 11801 EN 50288-2-2 TIA/EIA-568-B.2 VERIFIED
- 1.2 CONNECTOR: RJ45(8P8C) MALE CAT5E TYPE,
INSULATION: CLEAR POLYESTER, UL94V-2.
CONTACTS:BRASS, GOLD PLATED 30U
- 1.3 PVC MOLDING: PVC,
- 1.4 ALL COMPONENTS ARE RoHS COMPLIANT.

2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST

PIN OUT		CN2	COLOR
CN1	1	1	WHITE/ORANGE
	2	2	ORANGE
	3	3	WHITE/GREEN
	4	4	BLUE
	5	5	WHITE/BLUE
	6	6	GREEN
	7	7	WHITE/BROWN
	8	8	BROWN

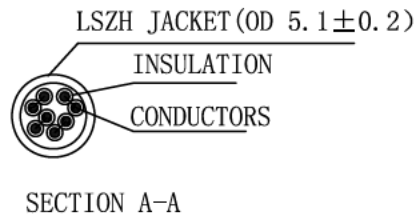

Length	Tolerance
≤1000mm	±30mm
1000<L≤5000mm	±50mm
5000<L≤10000mm	±100mm
10000<L≤20000mm	±200mm
20000mm<L	±500mm

		Tolerance: X. ±0.5 .X ±0.3 .XX ±0.10		SCALE: FREE	CUSTOMER:		Approved by	
		Angle: X° ±3' .X° ±1'		UNIT: mm	CUSTOMER P/N:		COMPANY P/N:	
00	NEW DOCUMENT	2017-08-10		REV.: 00	DWG. No. : T20170810-1		TITLE: CAT5E U/UTP PATCH CABLE	
REV.	DESCRIPTION	DATE		SHEET	1/1	Design by QIN MIN		Checked by