

DS-3E0326P-E(C) 100 Mbps Long Range PoE Switch

DS-3E0326P-E(C) switches are layer 2 100 Mbps PoE switches, providing advanced PoE power supply technology and Gigabit networks design on the basis of high-performance access to ensure stable data upload. The switches support long range, port isolation, and PoE watchdog function.



Key Feature


- Intelligent PoE management.
- Up to 300 m long range PoE transmission.
- Port isolation to improve network security.
- 6 KV surge protection to improve reliability in harsh environment.
- PoE watchdog to auto-detect and restart cameras that do not respond.

▪ Specification

	Model	DS-3E0326P-E(C)
Network Parameters	Port Number	24 × 100 Mbps PoE RJ45 ports, 2 × gigabit combos
	Port Type	RJ45 port, full duplex, MDI/MDI-X adaptive
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab
	Forwarding Mode	Store-and-forward switching
	Working Mode	Standard mode (default), Extend mode, Isolation mode, PoE watchdog mode
	High Priority Ports	Ports 1 to 8
	Ports for Long-Distance Transmission	Ports 17 to 24
	MAC Address Table	16 K
	Switching Capacity	8.8 Gbps
	Packet Forwarding Rate	6.5472 Mpps
	Internal Cache	4 Mbits
PoE Power Supply	PoE Standard	Ports 1 to 8: IEEE 802.3af, IEEE 802.3at
	PoE Power Pin	Ports 1 to 24: Ethernet cables 1/2/3/6 and 4/5/7/8 provide power supply simultaneously.
	PoE Port	Ports 1 to 24
	Max. Port Power	Ports 1 to 16: 30 W
	PoE Power Budget	370 W
Dialing Function	Long Range	Ports 17 to 24: up to 300 m.
	Port Isolation	Ports 1 to 24: port isolation mode to improve network security.
	PoE Watchdog	Ports 1 to 24: auto detect and restart the cameras that do not respond.
General	Shell	Metal material
	Gross Weight	3.54 kg (7.80 lb)
	Net Weight	2.785 kg (6.14 lb)
	Dimension (W × H × D)	440 mm × 220.8 mm × 44 mm (17.32" × 8.69" × 1.73")
	Operating Temperature	-10 to 55°C (14 to 131°F)
	Storage Temperature	-40 to 85°C (-40 to 185°F)
	Operating Humidity	5% to 95% (no condensation)
	Storage Humidity	5% to 95% (no condensation)
	Power Supply	100-240V~, 50/60 Hz, 6.5 A Max
	Power Consumption in Idle	< 30 W
	Power Source	400 W
Max. Power Consumption	400 W	
Approval	EMC	FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016)
	Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)

Physical Interface



Front Panel:

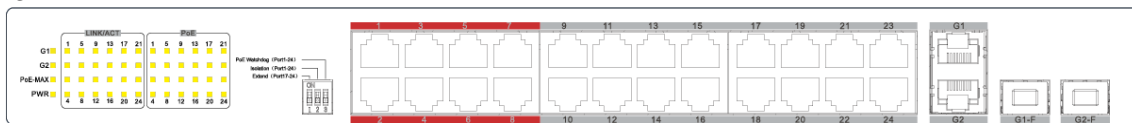

Rear Panel:




Dimension (unit: mm)

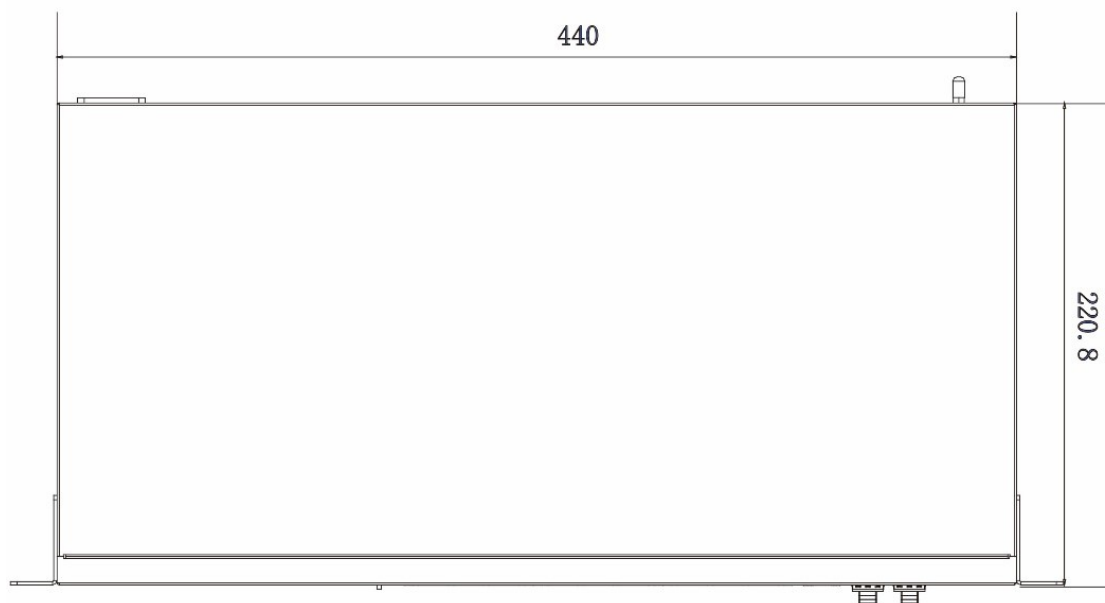

Available Model

DS-3E0326P-E(C)

▪ Typical Application

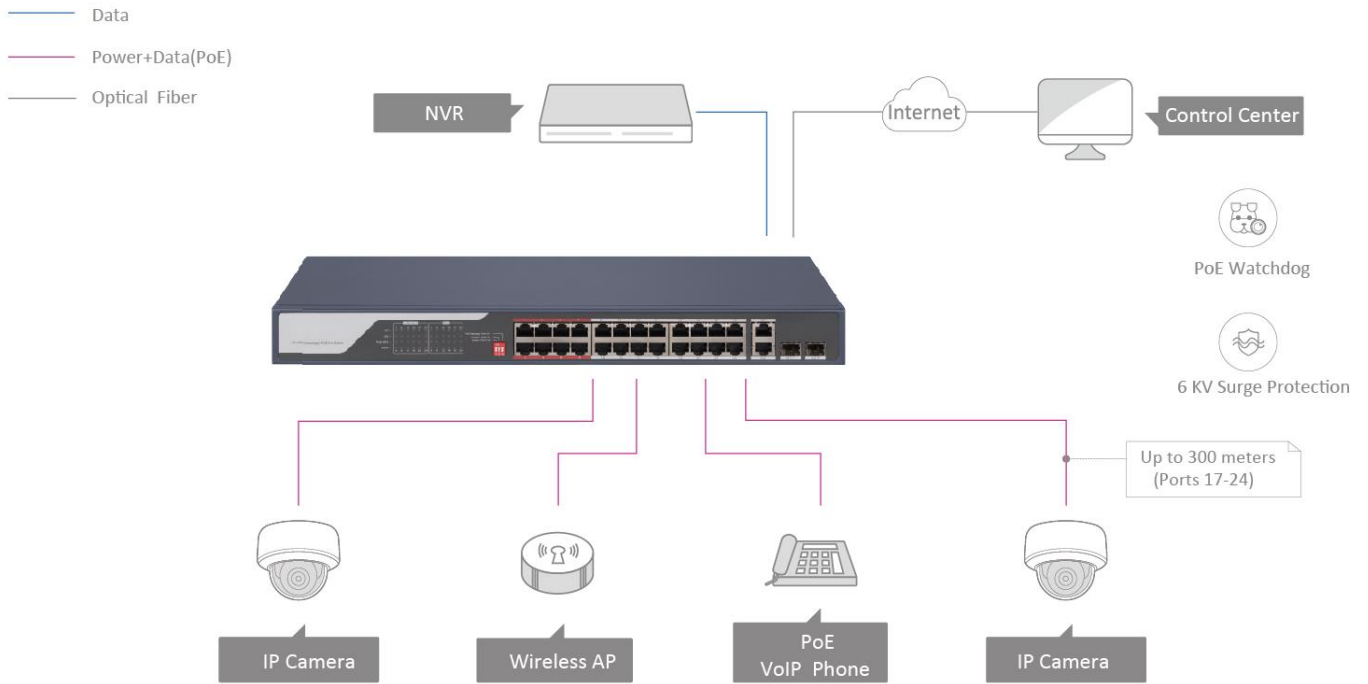

24-Port 10/100M PoE
10/100M Unmanaged PoE Pro-Series