


DS-KH6310-W/DS-KH6310

Indoor Station

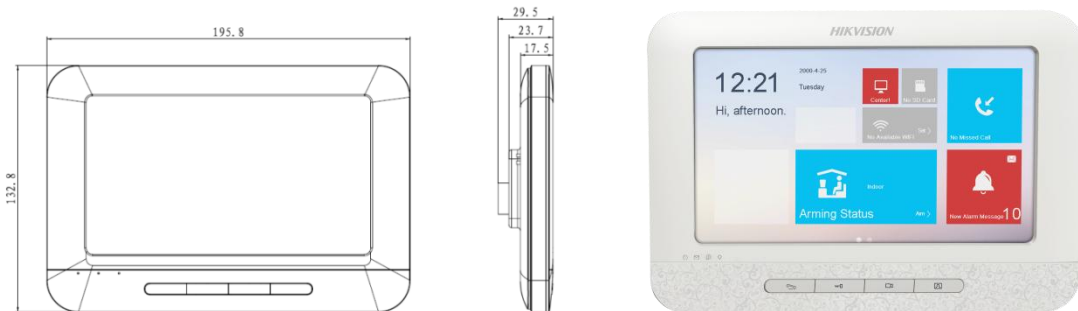

AVAILABLE MODELS


DS-KH6310-W

DS-KH6310

MAIN FEATURES

- Video intercom function
- Remote unlocking function
- Resident-to-resident audio call
- Live view of HD video
- Voice message function
- Auto-respond and no disturbing mode
- Noise suppression and echo cancellation
- 8-ch zone alarm and SOS calling function
- Community notice
- Convenient installation with the bracket, batch setting, and power over video/audio distributor (DS-KAD606, DS-KAD612)

TYPICAL APPLICATOIN

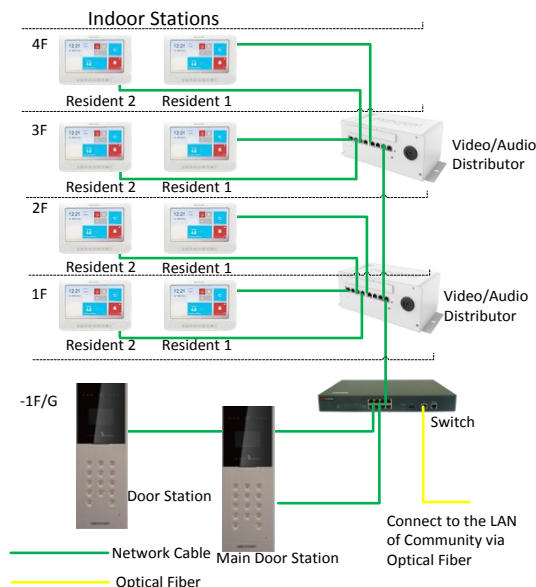

SPECIFICATION

Model	DS-KH6310-W	DS-KH6310
Parameters	Video Intercom Indoor Station with 7-Inch Touch Screen	
System Parameters	Processor	High-Performance Embedded SOC Processor
	Operation System	Embedded Linux Operation System
Display Parameters	Display Screen	7-Inch Colorful TFT LCD
	Display Resolution	800 × 480
	Operation Method	Capacitive Touch Screen, Physical Key
	Operation Interface	Flattened UI Operation Interface
Audio Parameters	Audio Input	Built-in Omnidirectional Microphone
	Audio Output	Built-in Loudspeaker
	Audio Compression Standard	G.711 U
	Audio Compression Rate	64 Kbps
	Audio Quality	Noise Suppression and Echo Cancellation Supported
Network Parameters	Ethernet	10M/100M Self-Adaptive Ethernet
	Wireless Internet	Wi-Fi 802.11 b/g/n

Model	DS-KH6310-W	DS-KH6310
Parameters	Video Intercom Indoor Station with 7-Inch Touch Screen	
	Network Protocol	TCP/IP, SNMP, SIP, RTSP
Alarm Parameters	Alarm Input	8-ch Alarm Input Sensor
Device Interfaces	Network Access	1 RJ45 10M/100M Self-Adaptive Ethernet Access
	RS485	1; RS-485 Half-Duplex
	I/O Output	1
Other Parameters	Power Supply	Power Over Network Cable (DS-KAD606, DS-KAD612)/12 V DC
	Power Consumption	≤10W
	Working Temperature	-10° C to +55° C (14° F to 131° F)
	Working Humidity	10% - 90%
	Dimension (L x W x H)	195.8 mm × 132.8 mm × 17.5 mm
	Certification	FCC, CE