

DS-K1T321EX Face Recognition Terminal



Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card/PIN authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- 2.4-inch LCD screen, 2 MP lens
- Multiple authentication methods, including face, card (EM card), and PIN, etc.
- Max. 500 faces, 3000 cards, and 150,000 events
- Face recognition duration < 0.2 s/User</p>
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the PC web client and mobile web client
- Supports wiring with secure door control unit or card reader via RS-485



•

Specification

System		
Operating system	Linux	
Display		
Screen size	2.4 inch	
Туре	Display screen	
Resolution	320 × 240	
Video		
Lens	1	
Resolution	2 MP (video stream: 720P)	
FOV	HFOV = 25°; VFOV = 43°	
Video standard	PAL (Default) and NTSC	
Audio		
Audio output	Built-in buzzer	
Network		
Wired network	10 M/100 M self-adaptive	
Interface		
Network interface	1	
Lock control	1	
Exit button	1	
Door contact input	1	
TAMPER	1	
RS-485	Support	
USB	1	
Capacity		
Face capacity	500	
Card capacity	3000	
Event capacity	150,000	
Authentication		
Face recognition distance	0.3 m to 1.5 m	
Face recognition accuracy rate	> 99%	
Face recognition duration	< 0.2 s	
Card type	EM card	
Card reading distance	0 to 5 cm	
Function		
Face anti-spoofing	Support	
Face recognition	Support	
General		
Supplement light	White light	
Power supply	12 VDC	
Power consumption	≤ 6 W	
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)	
Working humidity	0% to 90% (No condensing)	




Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean, Japanese
Keypad	Support


Available Model


DS-K1T321EX

Dimension



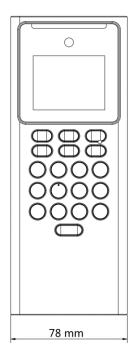







.



Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.











Hikvision Corporate Channel



©Hikvision Digital Technology Co., Ltd. 2022 | Data subject to change without notice |