


DS-2CD2722F-IS

2MP WDR Vari-focal Dome Network Camera

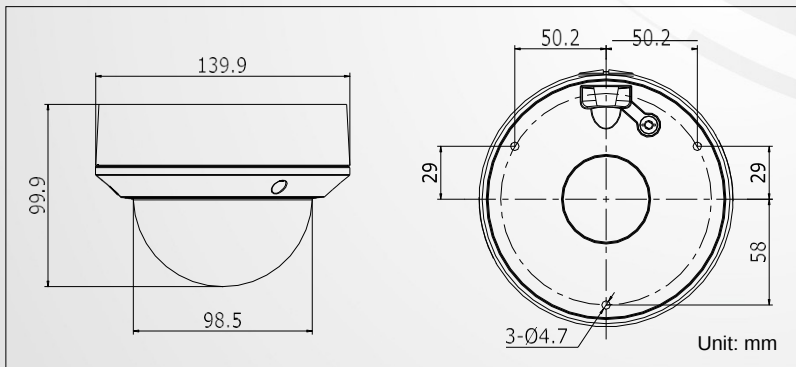

- 1/2.7" Progressive Scan CMOS
- Up to 2 megapixel resolution
- WDR
- 3D DNR
- 2.8-12mm, IR corrected lens
- Up to 30 meters IR range
- Micro SD/SDHC/SDXC card slot, up to 128GB
- Audio/alarm I/O
- 12V DC±25% & PoE(802.3af Class3)
- IP67
- IK10

Accessories



DS-1227ZJ
In-ceiling mount



DS-1273ZJ-135
Wall mount



DS-1273ZJ-135B
Wall mount with Junction box



DS-1280ZJ-DM21
Junction box



DS-2CD2722F-IS

2MP WDR Vari-focal Dome

Network Camera



Specification

Camera	
Image Sensor	1/2.7" Progressive Scan CMOS
Min. Illumination	0.01Lux @(F1.2,AGC ON, 50IRE) , 0.014 Lux @(F1.4,AGC ON,50 IRE), 0 Lux with IR
Shutter Speed	1/3 s ~ 1/100,000 s
Slow Shutter	Support
Lens	2.8 - 12 mm @ F1.3, motorized lens, Auto focus , angle of view: 106°~35°
Angle Adjustment	Pan:0° - 355°, Tilt: 0° - 75°, Rotation: 0° - 355°
Lens Mount	Φ14
Day & Night	IR cut filter with auto switch
Signal to Noise Ratio	≥ 50 dB
WDR	Support
Compression	
Video Compression	H.264/MJPEG/H.265
H.264 Type	Main Profile
Video Bit Rate	32 Kbps – 16 Mbps
Audio (-S)	G.711/G.722.1/G.726/MP2L2, 64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Image	
Max. Resolution	1920 × 1080
Max Frame Rate	50Hz: Main stream: 25fps(1920 × 1080, 1280 × 960, 1280 × 720); Sub stream: 25fps(352×288), 25fps(640×360)
Triple stream	Support
Enhancement	BLC/3D DNR/ROI
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, White Balance, exposure control, Sharpness adjustable by client software
Day/Night Switch	Auto/Schedule/Triggered by Alarm In
Network	
Network Storage	NAS (Support NFS,SMB/CIFS); ANR, Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB
Detection	Intrusion detection, Line crossing detection, Motion detection, Dynamic analysis, Region entrance, Region exiting, Scene change detection, Sudden audio increase/decrease detection, Audio loss detection, Defocus detection, Face detection
Alarm Trigger	Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General Function	One-key reset, Anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, anonymous access, User access log, Encryption
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General	
Certification	UL,CE,FCC
Interface	1 RJ45 10M/100M Ethernet interface
Operating Conditions	-30 °C – 60 °C (-22 °F – 140 °F), Humidity 95% or less (non-condensing)
Power Supply	12V DC±25%, PoE (802.3af, Class 3), Max. 5.5 W
Material	Front Cover & Base: Metal
Ingress Protection	IP67
Impact Protection	IEC60068-275Eh, 20J; EN50102, up to IK10
IR Range	30 meters
Dimensions	Φ 140 × 99.9 mm (Φ 5.51" × 3.94")
Weight	1000g (2.20lbs)