

## DS-K3B411X Swing Barrier



The DS-K3B411X series swing barrier with 6 pairs of IR lights is designed to detect unauthorized entrance or exit. By adopting the swing barrier integratedly with the access control system, person should authenticate to pass through the lane via presenting IC or ID card, scanning QR code, etc. It is widely used in attractions, stadiums, construction sites, residences, etc.

- 6 pairs of IR light detectors: Permissions validation and anti-tailgating
- LED light indicates passing direction
- Audible and visual nipping alarm: The barrier will stop working for a period of time when detecting obstruction when open/close barrier
- Self-detection, Self-diagnostics, and automatic alarm
- Valid passing duration settings: System will cancel the passing permission if a person does not pass through the lane within the valid passing duration
- Door remaining open when fire alarm triggered: The barrier will open automatically when alarm is triggered.
- Barrier will automatically open when powering down



## ▪ Specification

System	
MCBF	> 3 million times
Motor	Brush motor
Interface	
Network interface	1
RS-485	4
RS-232	6
Lock output	2
IO input	2
IO output	2
General	
Throughput	20 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
Power supply method	100 to 240 VAC; 50 to 60 Hz
IR light detectors	6 pairs
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Lane width	550 mm to 1100 mm
Barrier material	Stainless steel pipe; Acrylic glass
Working humidity	10% to 95% (No Condensing)
Pedestal material	SUS304 stainless steel
Dimensions	Without packaging: 1200 mm × 200 mm × 1020 mm (47.2" × 7.9" × 40.2") With packaging: 1408 mm × 348 mm × 1156 mm (55.4" × 13.7" × 45.5")
Weight	Net (Approximately): 38.3 kg (Left), 43.3 kg (Middle), 40.2 kg (Right)/84.5 lb (Left), 95.5 lb (Middle), 88.6 lb (Right) Rough (Approximately): 66.5 kg (Left), 71.5 kg (Middle), 68.4 kg (Right)/146.6 lb (Left), 157.7 lb (Middle), 150.8 lb (Right)
Application environment	Indoor and outdoor

## ▪ Maintenance

The main element of the turnstile is stainless steel, which is rustless (antioxidant) and corrosion resistant (The anti corrosion ability in the medium of acid, alkali, and salt). In order to keep the stainless steel from being oxidized or corroded, you should clean and care the turnstile surface periodically .


The instructions and tips for maintaining the turnstile are as follows:


- Select different stainless steel types according to the variety of the environments. You can select 304 stainless steel for common circumstances and 316 stainless steel for the scenarios of seashores and chemical plants.
- Keep the device surface clean and dry.
- Use non-woven cloth and ethyl alcohol to clean the dirt on the device surface.
- Use sourcing pad (do not use mesh cleaning ball) to clean the rust on the device surface by following the wire drawing on the stainless steel. And then use non-woven cloth and stainless steel cleaner to wipe the device surface.
- Clean and maintain the device by using non-woven cloth and stainless steel cleaner periodically. It is suggest to clean the device every month in common circumstances and every week for severe environments (seaside and chemical plants for instance).

▪ Available Model

DS-K3B411X-R, DS-K3B411X-L, DS-K3B411X-M

▪ Dimension

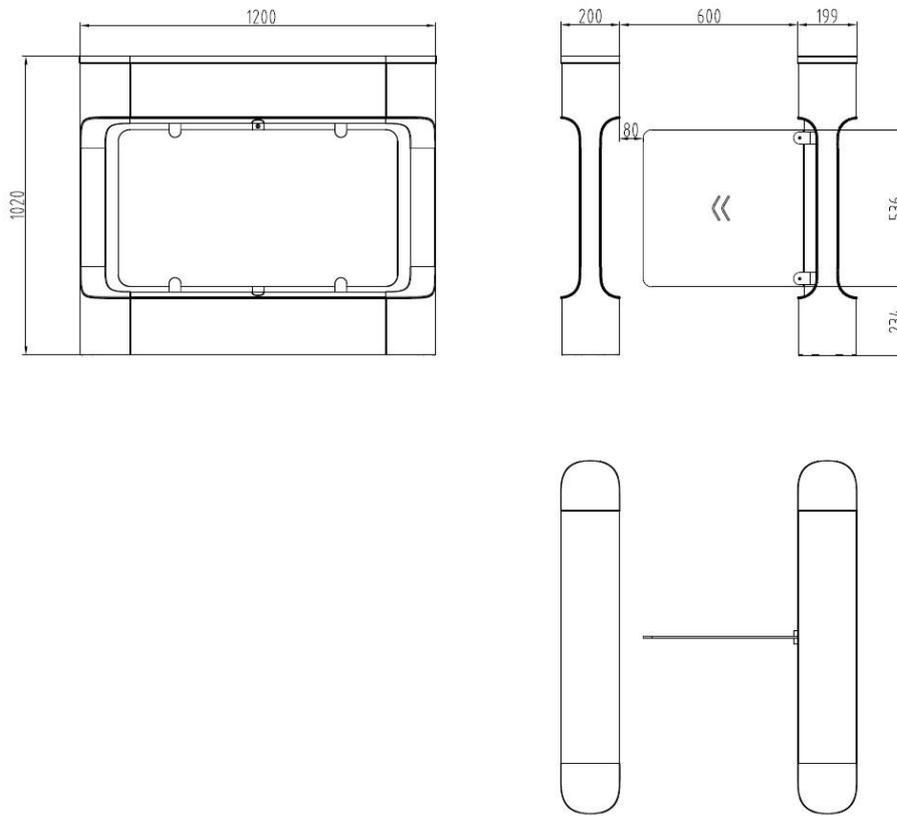

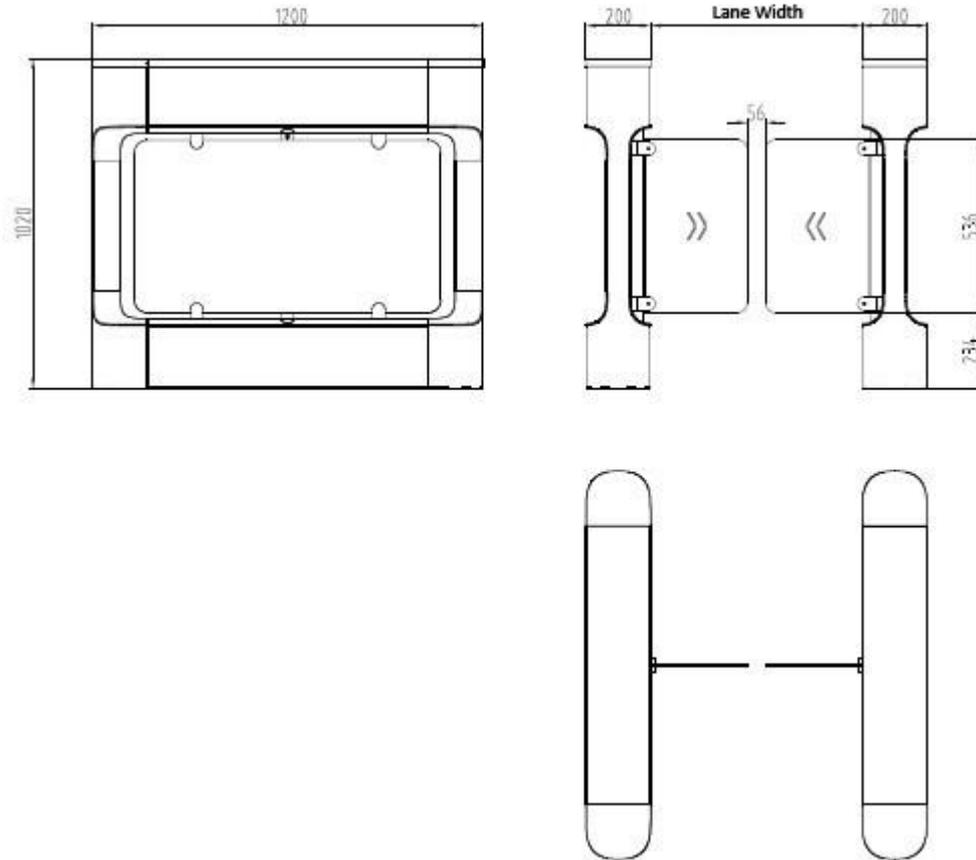

- Accessory
- Optional

DS-K3B411X-BAS

E



Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com