


DS-7204AHWLI-E2


ATM & POS DVR

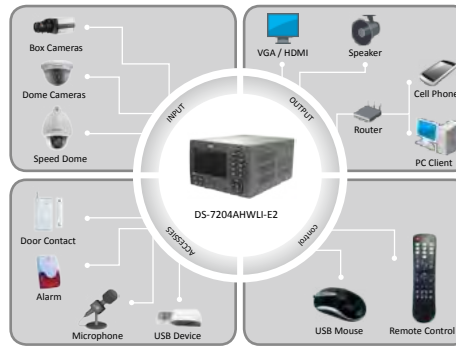

Key features

- H.264 & Dual-stream video compression
- Up to WD1(PAL:960×576,NTSC:960×480) resolution recording for analog cameras
- HDMI and VGA output at up to 1920×1080P resolution
- Providing multiple modes and protocols for ATM transaction information text overlay;
- Command recording and capture triggered by ATM transaction
- 2 SATA interfaces
- 5-inch LCD display

Rear Panel of DS-7204AHWLI-E2

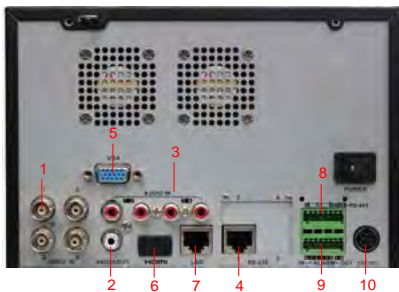

1. Video in
2. Audio out
3. Audio in
4. RS-232
5. VGA interface
6. HDMI interface
7. LAN
8. RS-485 interface, alarm in, alarm out
9. 12 VDC power supply
10. Switch

Available models

DS-7204AHWLI-E2

DS-7204AHWLI-E2

Video/Audio input	
Analog and HD-TVI video input	4-ch 8-ch BNC(1.0Vp-p, 75Ω), PAL/NTSC self-adaptive
Audio input	4-ch BNC (2.0Vp-p, 1KΩ)
Recording resolution	WD1 / 4CIF / DCIF / 2CIF / CIF / QCIF
Two-way audio	1-ch, BNC (2.0Vp-p, 1KΩ)
Video/Audio output	
HDMI output	1-ch; 1920 × 1080 / 60 Hz(1080P), 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz
VGA output	1-ch; 1920 × 1080 / 60 Hz(1080P), 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704×576, NTSC: 704×480
LCD display	5-inch LCD display supporting touch operation
Encoding/Decoding Parameters	
Video compression	H.264
Encoding resolution	Main stream: WD1 / 4CIF / 2CIF / CIF / QCIF Sub-stream: CIF / QCIF
Frame rate	Main stream: 25 fps (P) / 30 fps (N) Sub-stream: 25 fps (P) / 30 fps (N)
Video bitrate	32 Kbps ~ 3072Kbps
Audio compression	G711_U
Audio bitrate	64Kbps
Dual-stream	Support
Stream type	Video, Video & Audio
Synchronous playback	4-ch
Hard disk	
SATA	2 SATA interface
Capacity	Up to 4 TB capacity for each disk
External interface	
Network interface	1; 10M/100M/1000M self-adaptive Ethernet interface
USB port	1, RS-232; 1, RS-485
USB port	2 × USB2.0
Alarm in	9
Alarm out	4
Power supply (for external device)	2-ch, DC 12V/1A
General	
Power supply	12 VDC
Consumption	≤ 13 W (without hard disk or DVD-R/W)
Working temperature	-10 °C ~ +55 °C (14°F ~ 131°F)
Working humidity	10% ~ 90%
Chassis	19-inch rack-mounted 1U chassis
Dimensions (W x D x H)	445 × 261 × 44.5 mm
Weight	≤ 4 Kg / 8.82 lb(without hard disk)