

DS-7716NXI-K4/16P

16-ch 1.5U 16 PoE K Series AcuSense 4K

Key Feature

- Up to 16-ch IP camera inputs, plug & play with 16 power-over-Ethernet (PoE) interfaces
- H.265+/H.265/H.264+/H.264 video formats
- Up to 2-ch@12 MP or 3-ch@8 MP or 6-ch@4 MP or 12-ch@1080p decoding capacity
- Up to 160 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



Smart Function

- All channels support Motion Detection 2.0
- 2-ch video analysis for human and vehicle recognition to reduce false alarm
- 1-ch facial recognition for video stream, or 4-ch facial recognition for face picture
- Smart search for the selected area in the video, and smart playback to improve the playback efficiency

Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Adopt stream over TLS encryption technology which provides more secure stream transmission service

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 4 SATA interfaces for HDD connection (up to 10 TB capacity per HDD)
- 16-ch synchronous playback

Network & Ethernet Access

- 16 independent PoE network interfaces
- 1 self-adaptive 10/100/1000 Mbps Ethernet interface
- Hik-Connect for easy network management

▪ Specification

| Intelligent Analytics | |
|--|---|
| AI by Device | Facial recognition, perimeter protection, motion detection 2.0 |
| AI by Camera | Facial recognition, perimeter protection, throwing objects from building, motion detection 2.0, ANPR, VCA |
| Facial Recognition | |
| Facial Detection and Analytics | Face picture comparison, human face capture, face picture search |
| Face Picture Library | Up to 16 face picture libraries, with up to 20,000 face pictures in total (each picture ≤ 4 MB, total capacity ≤ 1 GB) |
| Facial Detection and Analytics Performance | 1-ch, 8 MP |
| Face Picture Comparison | 4-ch |
| Motion Detection 2.0 | |
| By Device | All channels, up to 4 MP (when enhanced SVC mode is enabled, up to 8 MP) video analysis for human and vehicle recognition to reduce false alarm |
| By Camera | All channels |
| Perimeter Protection | |
| By Device | 2-ch, 4 MP (HD network camera, H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm |
| By Camera | All channels |
| Video and Audio | |
| IP Video Input | 16-ch |
| Incoming Bandwidth | 160 Mbps |
| Outgoing Bandwidth | 160 Mbps |
| HDMI Output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz |
| Video Output Mode | HDMI/VGA independent output |
| CVBS Output | N/A |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) |
| Two-Way Audio | 1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input) |
| Decoding | |
| Decoding Format | H.265/H.265+/H.264+/H.264 |
| Recording Resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/ 720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF |
| Synchronous playback | 16-ch |


| | |
|----------------------------|--|
| Decoding Capability | AI on: 1-ch@12 MP (30 fps)/2-ch@8 MP (30 fps)/4-ch@4 MP (30 fps)/8-ch@1080p (30 fps) AI off: 2-ch@12 MP (30 fps)/3-ch@8 MP (30 fps)/6-ch@4 MP (30 fps)/12-ch@1080p (30 fps) |
| Stream Type | Video, Video & Audio |
| Audio Compression | G.711ulaw/G.711alaw/G.722/G.726/AAC |
| Network | |
| Remote Connection | 128 |
| API | ONVIF (profile S/G); SDK; ISAPI |
| Compatible Browser | IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version |
| Network Protocol | TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS |
| Network Interface | 1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface |
| PoE | |
| Interface | 16 |
| Power | ≤ 200 W |
| Standard | IEEE 802.3af/at |
| Auxiliary Interface | |
| SATA | 4 SATA interfaces |
| Capacity | Up to 10 TB capacity for each HDD |
| Serial Interface | 2 RS-485 (half-duplex), 1 RS-232 |
| Alarm In/Out | 16/4 (16/9 is optional) |
| USB Interface | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 |
| Ctrl 12V | N/A (optional to support) |
| DC 12V | N/A (optional to support) |
| General | |
| GUI Language | English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian |
| Power Supply | 100 to 240 VAC, 50 to 60Hz |
| Consumption | ≤ 20 W (without HDD and PoE off) |
| Working Temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| Working Humidity | 10 to 90 % |
| Dimension (W × D × H) | 445 × 400 × 75 mm (17.5"× 15.7" × 3.0") |

| | |
|------------------------|--|
| Weight | ≤ 5 kg (without HDD, 11 lb.) |
| Certification | |
| FCC | Part 15 Subpart B, ANSI C63.4-2014 |
| CE | EN 55032: 2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4, EN 55035: 2017 |
| Obtained Certification | CE, FCC, IC, CB, KC, UL, Rohs, Reach, WEEE, RCM, UKCA, LOA, BIS |

Note:


- Alarm in/out can be optional for certain models. If you select a device model with "/Alarm16+9", then the device will have 16 alarm inputs and 9 alarm outputs.
- Facial recognition, motion detection 2.0 or perimeter protection cannot be enabled at the same time.

Dimension

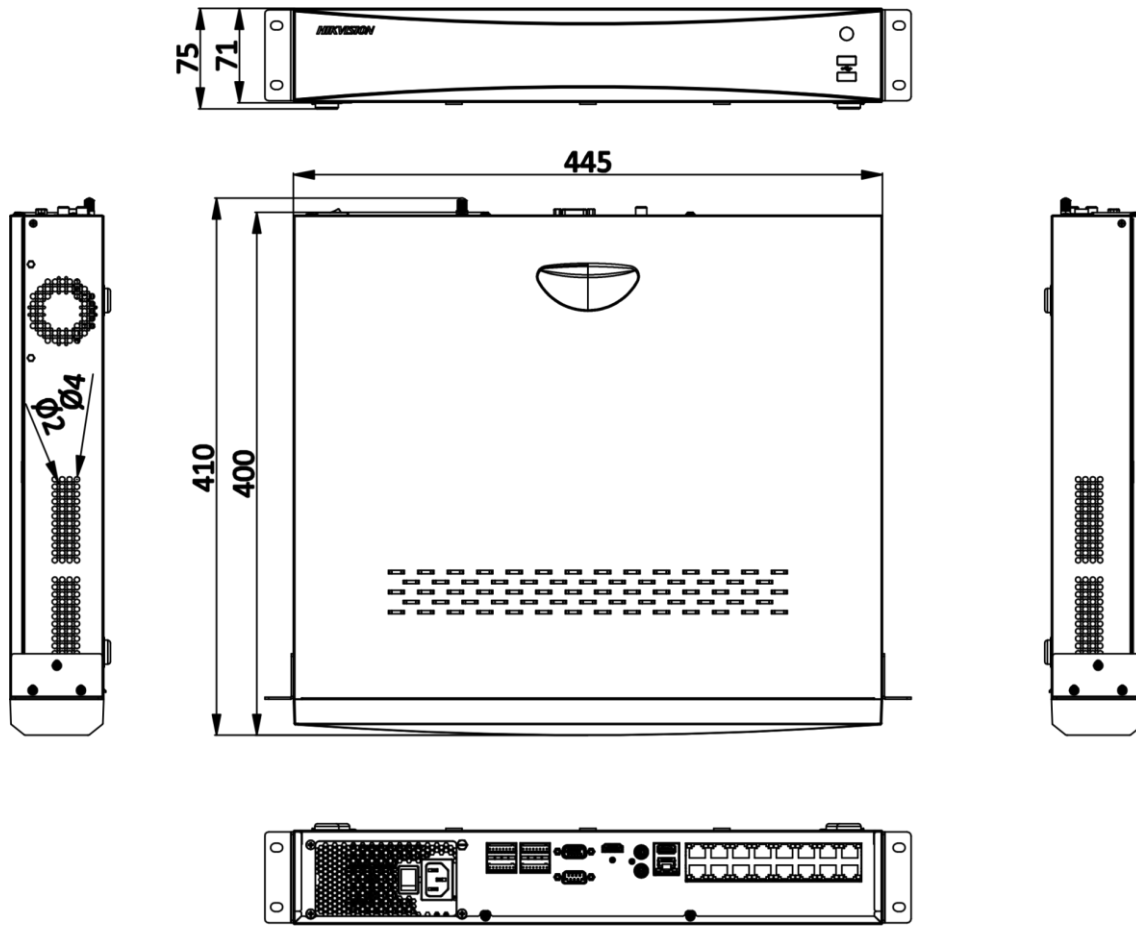

scale/1:1;Unit/mm

Physical Interface

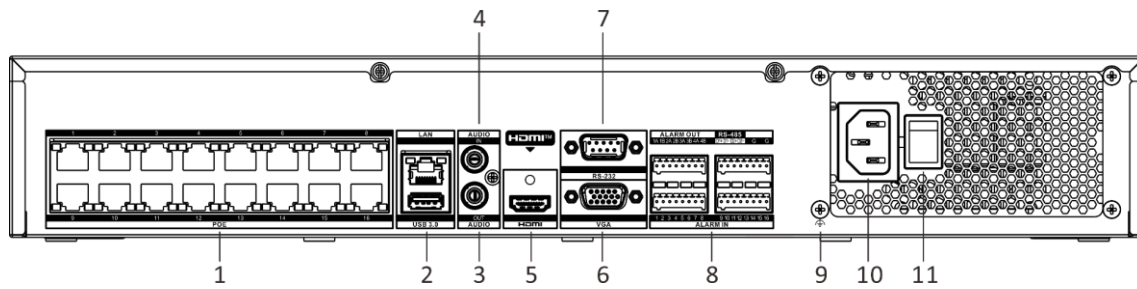

| No. | Description | No. | Description |
|-----|--------------------------------------|-----|--------------------------------|
| 1 | Network interfaces with PoE function | 7 | RS-232 serial interface |
| 2 | USB 3.0 interface and LAN interface | 8 | Alarm in, alarm out and RS-485 |
| 3 | Audio out | 9 | GND |
| 4 | Audio in | 10 | Power supply |
| 5 | HDMI interface | 11 | Power switch |
| 6 | VGA interface | | |

Available Model

DS-7716NXI-K4/16P

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

