

## DS-7700NI-I4(B) Series NVR

### Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Up to 16/32-ch IP camera inputs
- Up to 1-ch@32 MP/2-ch@12 MP/16-ch@1080p decoding capacity
- Up to 160/256 Mbps incoming bandwidth



### Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

### HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

### Storage and Playback

- Up to 4 SATA interfaces for HDD connection
- 16-ch synchronous playback

### Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm

### Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in




## Specification

Model	DS-7716NI-I4(B)	DS-7732NI-I4(B)
<b>Video and Audio</b>		
IP video input	16-ch	32-ch
	Up to 32 MP resolution *: After ultra HD resolution mode is enabled, the NVR supports up to 4-ch 32 MP/24 MP IP video inputs.	
Incoming bandwidth	160 Mbps	256 Mbps
Outgoing bandwidth	256 Mbps	
HDMI 1 output	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
HDMI 2 output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
VGA output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
Video output mode	HDMI1/VGA simultaneous output, HDMI2/VGA independent output	
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
Audio output	1-ch, RCA (Linear, 1 KΩ)	
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)	
<b>Decoding</b>		
Decoding format	H.265+/H.265/H.264+/H.264/MPEG4	
Recording resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF *: After ultra HD resolution mode is enabled, the NVR supports up to 4-ch 32 MP/24 MP IP video inputs.	
Synchronous playback	16-ch	
Capability	1-ch@32 MP (30 fps)/2-ch@12 MP (20 fps)/4-ch@8 MP (25 fps)/8-ch@4 MP (30 fps)/16-ch@1080p (30 fps)	
Dual stream recording	Support	
Stream type	Video, Video & Audio	
Audio compression	G.711ulaw/G.711alaw/G.722/G.726	
<b>Network</b>		
Remote connections	128	
Network protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS	
Network interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface	
<b>Auxiliary Interface</b>		
Serial port	1 RS-485 (half-duplex), 1 RS-232	
SATA	4 SATA interfaces	
eSATA (optional)	1 eSATA interface	
Capacity	Up to 10 TB capacity for each disk	
Alarm in/out	16/4 (16/8 optional)	
USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0	
<b>General</b>		
Power supply	100 to 240 VAC, 50 to 60 Hz	
Consumption	≤ 20 W	


<b>(without HDD)</b>	
<b>Working temperature</b>	-10 °C to 55 °C (14 °F to 131 °F)
<b>Working humidity</b>	10% to 90%
<b>Chassis</b>	19-inch rack-mounted 1.5U chassis
<b>Dimension (W × D × H)</b>	445 × 400 × 75 mm ( 17.5"× 15.7" × 3.0")
<b>Weight (without HDD)</b>	≤ 5 kg (11 lb)
<b>Certification</b>	
<b>FCC</b>	Part 15 Subpart B, ANSI C63.4-2014
<b>CE</b>	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4

# Dimension

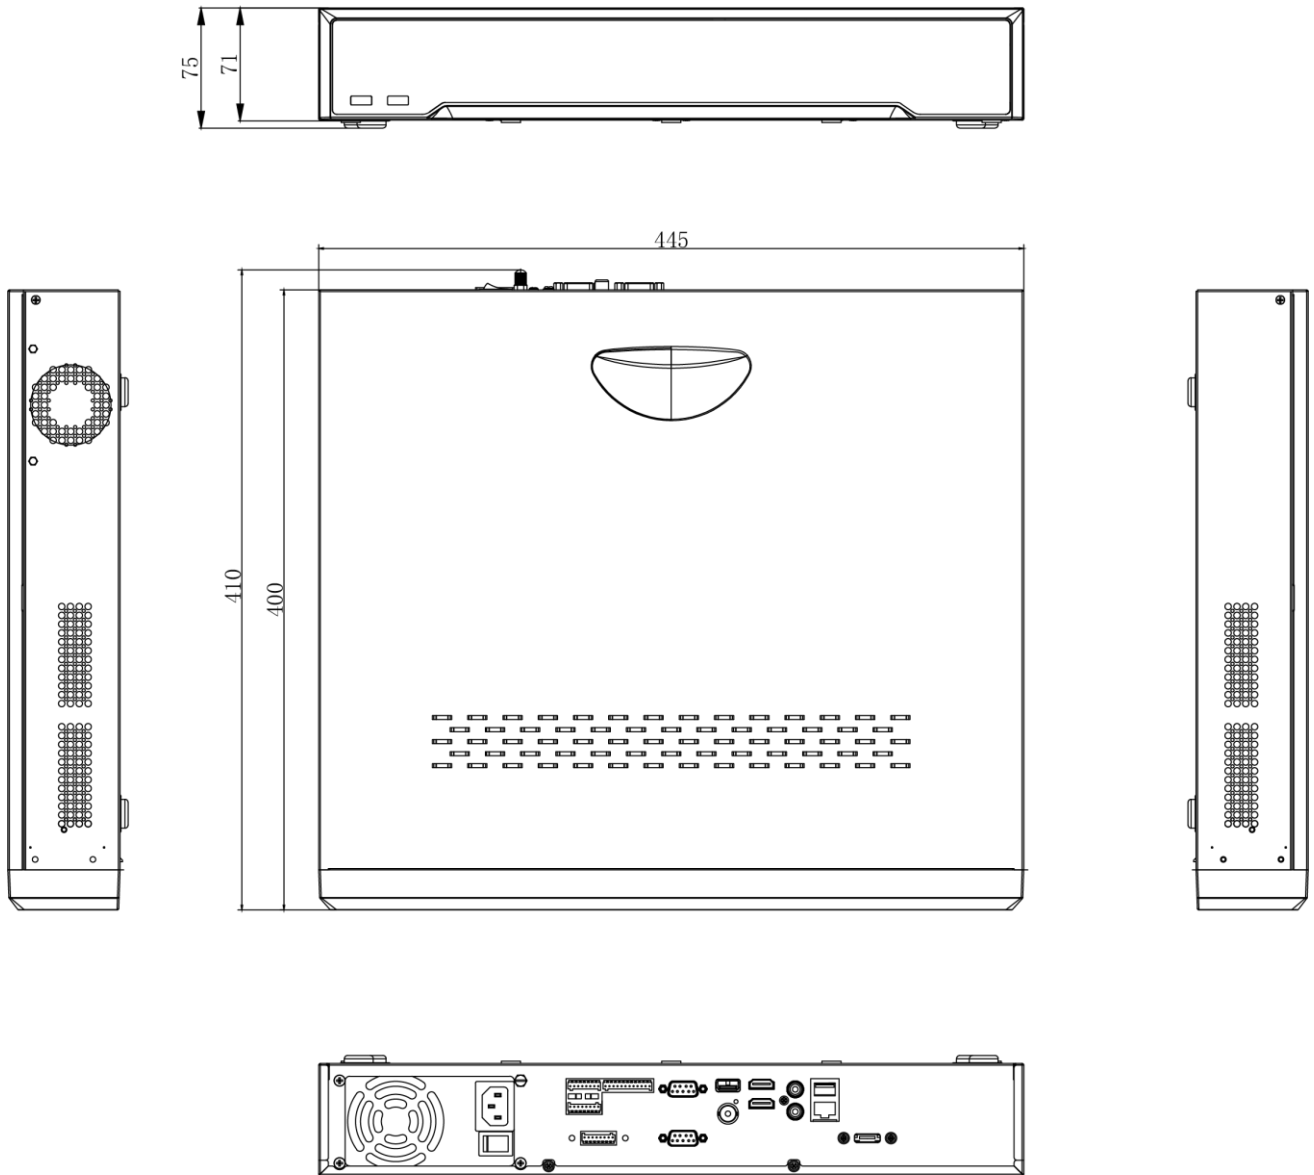

scale/1:1;Unit/mm

## Physical Interface

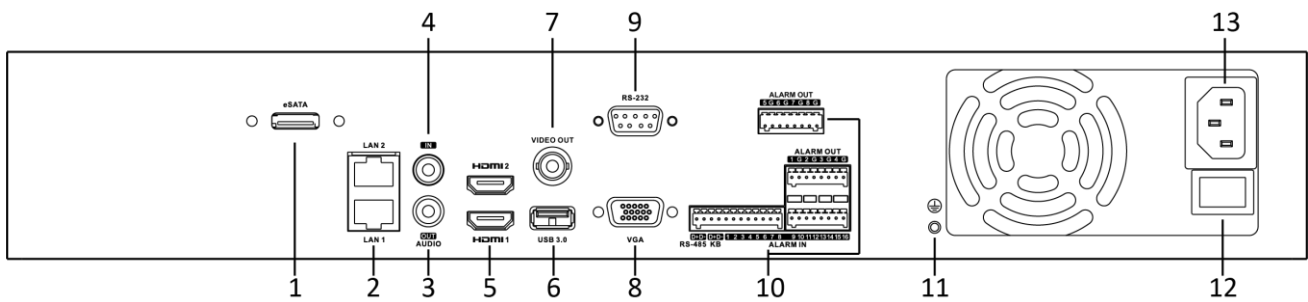

No.	Description	No.	Description
1	eSATA Interface	8	VGA Output (DB9 Connector)
2	LAN1 and LAN2 Interfaces	9	RS-232 Serial Interface
3	AUDIO OUT	10	RS-485 Serial Interface, Controller Port, ALARM IN, ALARM OUT 16/4 (16/8 optional)
4	AUDIO IN	11	GND
5	HDMI 1 and HDMI 2 Interfaces	12	Power Switch
6	USB 3.0 Interface	13	100 to 240 VAC Power Supply
7	VIDEO OUT		

## Available Model

DS-7716NI-I4(B), DS-7732NI-I4(B)

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
sales.au@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com